



Webnet Micro geliefert als Rolle Werkstoffgruppe AISI 316 | Randausbildung H24 | Lieferung ab Lager
Webnet Micro 1巻単位 材質 AISI 316 (SUS 316) | 端末タイプ H24 | 在庫品
Webnet Micro delivered as rolls Material group AISI 316 | Perimeter type H24 | Delivery from stock

Nr. / № / No.	Webnet Micro Rope Nr. / № / No.	Seil Rope Ø	Konstruktion Rope Construction	Höhe x Länge 高 x 長さ Height x Length H x L	Anzahl Maschen メッシュ数 Number of meshes	Einbauhöhe 取付可能高さ Installation height	Gewicht 重量 Weight
		mm		mm		min. – max. mm	kg
21261-1540-082	20261-0150-040	1,5	6×7+WC	800 x 20000	20 x 265	770 – 900	13,6
21261-1540-085	20261-0150-040	1,5	6×7+WC	800 x 50000	20 x 664	770 – 900	34
21261-1540-092	20261-0150-040	1,5	6×7+WC	900 x 20000	22 x 266	870 – 1000	15,3
21261-1540-095	20261-0150-040	1,5	6×7+WC	900 x 50000	22 x 665	870 – 1000	38,25
21261-1560-082	20261-0150-060	1,5	6×7+WC	800 x 20000	13 x 185	770 – 900	8
21261-1560-085	20261-0150-060	1,5	6×7+WC	800 x 50000	13 x 464	770 – 900	20
21261-1560-092	20261-0150-060	1,5	6×7+WC	900 x 20000	15 x 185	870 – 1000	9
21261-1560-095	20261-0150-060	1,5	6×7+WC	900 x 50000	15 x 464	870 – 1000	22,5

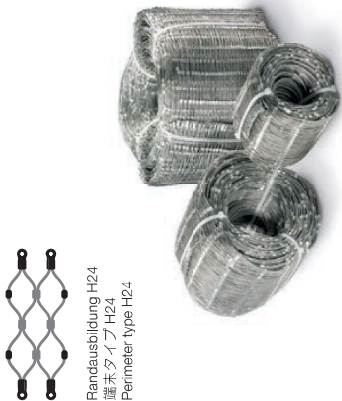

Webnet Werkstoffgruppe AISI 316 | Maschenwinkel ~ 60°
材質 AISI 316 (SUS 316) | メッシュ角 ~ 60°
Material group AISI 316 | Mesh angle ~ 60°

Nr. / № / No.	Seil Rope Ø	Konstruktion Rope Construction	Maschenweite メッシュサイズ Mesh aperture MW x ML	Gewicht 重量 Weight	Selllänge Rope length	Anzahl Hülsen スリーブ数 Number of sleeves	Durchgangsmasse ¹ メッシュ開口部 ¹ Mesh aperture		
	mm		mm	kg / m ²	m / m ²	per / pair / per m ²	A	a	b
20256-0300-040	3	6×19+WC	40 x 74,8	4,1	60	760	1 198	17	36
20256-0300-050	3	6×19+WC	50 x 90,5	2,91	48	490	1 909	22	44
20256-0300-060	3	6×19+WC	60 x 106,6	2,27	40	360	2 771	27	51
20256-0300-070	3	6×19+WC	70 x 124	1,81	34	260	3 869	32	60
20256-0300-080	3	6×19+WC	80 x 141	1,51	30	195	5 110	37	69
20256-0300-100	3	6×19+WC	100 x 175	1,18	25	130	8 101	47	86
20256-0300-120	3	6×19+WC	120 x 209	0,96	21	95	11 655	57	103
20256-0300-140	3	6×19+WC	140 x 244	0,8	18	73	16 191	67	120
20256-0300-160	3	6×19+WC	160 x 279	0,69	16	57	21 309	77	138
20256-0300-180	3	6×19+WC	180 x 313	0,59	14	45	27 040	87	155
20256-0300-200	3	6×19+WC	200 x 346,18	0,46	11	33	33 372	97	172
20256-0300-250	3	6×19+WC	250 x 432,95	0,34	9	22	52 571	122	215
20256-0300-300	3	6×19+WC	300 x 519,38	0,29	7	18	76 059	147	258
20256-0300-400	3	6×19+WC	400 x 691,89	0,24	6	12	135 930	197	344

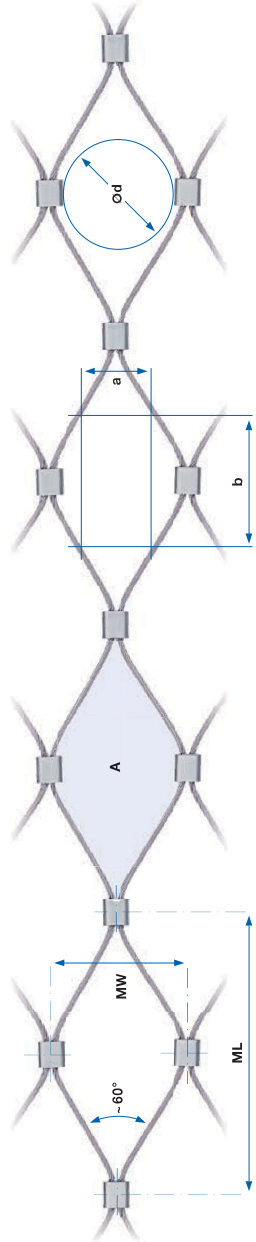

¹ Die ausgewiesenen Durchgangsmasse ändern sich bei abweichendem Maschenwinkel von ~60°.


² Die maximale Produktionslänge (L_{max}) bezieht sich auf die horizontale Maschenrichtung. In der Höhe (H) gibt es keine produktionstechnischen Grenzen. Aus logistischen und montage-technischen Gründen ist jedoch auf das Gesamtgewicht pro Netz zu achten. Lieferung von Überlängen nur nach vorgängiger Abklärung.

¹ 表に示したメッシュサイズは標準角度50°の数値です。角度によって数値は変わります。

² ネット最大(L_{max})はメッシュ方向横目での数値です。H寸法に制限はありませんが、1枚当たりの重量を取付の手間を考慮して決定してください。過度に大きい寸法の場合、事前の了承をもって納品いたします。

¹ The stated passage dimensions change with a deviating mesh angle of ~60°.

² The maximum net length (L_{max}) refers to the horizontal mesh direction. There are no production limits for the height (H). However, for logistical and installation reasons, the total weight per net must be taken into consideration. Delivery of excess lengths are only possible after prior approval.

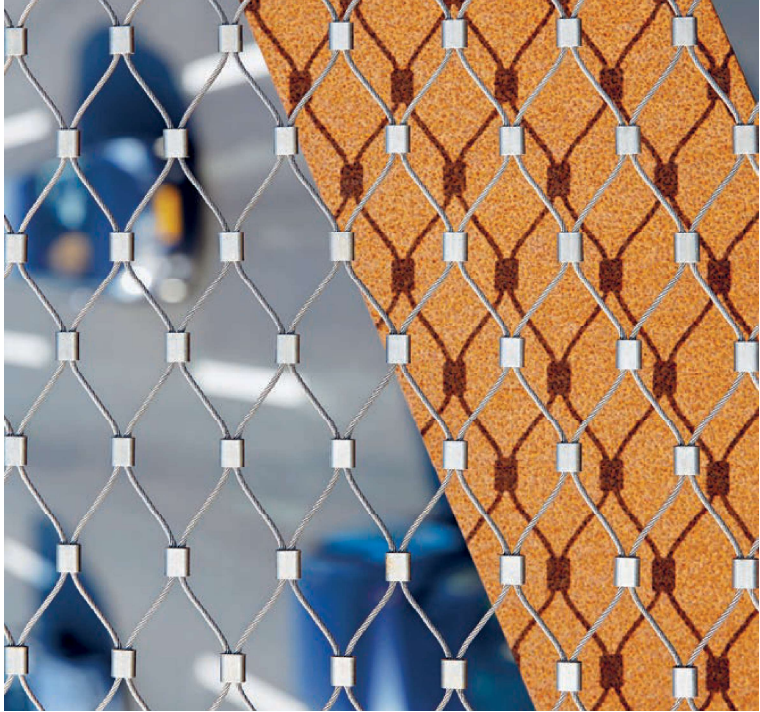

max. Produktionslänge ¹ 製作可能長さ ¹ max. production lengths ¹	L _{max}	max. Durchlässigkeit ¹ 透光度 ¹ Light transmission
m	%	
60	74,3	
70	76	
80	84	
85	87	
90	88,7	
100	91,4	
100	93	
100	94	
100	95	
100	95,6	
100	96	
100	97	
100	97,5	
100	98,2	

